

Product information | TECHNICAL DATA SHEET

NITRO 2G COLORS

500ml, 14 Oz, 390 g

GENERAL DESCRIPTION

The Nitro 2G technology was designed to produce very fast-drying results, available in a range of high coverage colors. These paints are formulated with alkyd resins and matt finish pigments.

FEATURES

- High pressure.
- Very fast drying.
- Does not contain lead nor other heavy metals.
- Hardens well.
- Excellent flexibility.
- Excellent coverage.
- Silver Killer (covers metallic paints).
- Great pigment durability.
- Strong resistance to abrasion once the film is polymerized.
- Easy to apply and repaint.
- Excellent resistance to the sun and rain.
- Very good resistance to UV light (see chart).

APPLICATIONS

Due to the characteristics of this product, we recommend using it for final finishes. Since it is a high quality paint, it may also be used for an endless amount of jobs where its qualities are required.

- Industry
- Crafts
- Touch-ups
- DIY
- Road works
- Sign painting

INSTRUCTIONS FOR USE

- Shake the aerosol well before using, approximately for one minute after hearing the sound of the mixer.
- For best results apply in thin layers. Three thin layers are always better than one thick one, and may be repainted within ten minutes with the same paint.
- Turn the aerosol upside down to clean out the valve after use, if te nozzle becomes blocked replace it with a new one.
- Never apply to equipment that is plugged in and use in well ventilated areas.
- Request safety datasheets.

PHYSICAL PROPERTIES

Color:	See chart
Brillo 60° (ASTM D-523 ISO 2813)	<10%
Dry to the touch (ASTM D-1640 ISO 1517):	10'
Completely dry (ASTM D-1640 ISO 1517):	30'
Thickness of dry layer ((ASTM D-823 ISO 2808):	20 µ/lyers
Theoretical yield (continuous painting):	2,8 m²
Thinner:	Ethyl Acetate
Product life:	> 5 years
Second coat:	After 10'
Heat resistance of paint:	100°C
Condition for application:	Minimum room temperature 8°C Surface temperature 5°C a 50°C Max humidity . 85% R.H.P

* All of the adherence tests have been carried out on steel plates.


CAUTION



APPEARANCE



COLORS

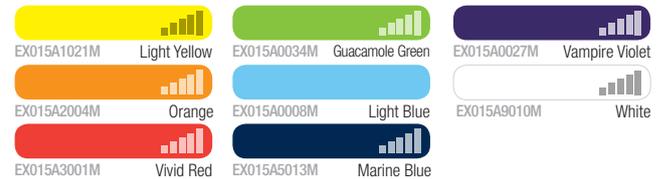

LABEL



CAP SYSTEM



PACKAGING

Nominal capacity 400ml.
Heat resistance of packaging: <50°C
Propellant: GLP C3-C4
Pressure: High pressure
Valve: Female

Box (6 units)
205 X 140 X 200 mm.



Product information | TECHNICAL DATA SHEET

NITRO 2G COLORS - Silver

500ml, 14 Oz, 390 g

GENERAL DESCRIPTION

Very fast drying acrylic enamel, formulated with extremely high quality resins and metallic, inorganic pigments.

FEATURES

- High pressure.
- Very fast drying.
- Excellent adherence.
- Long-lasting gloss finish on interiors.
- Does not contain lead or other heavy metals.
- Easy to apply and repaint.
- Since it is a "leafing" pigment paint, it does not resist weathering or mechanical wear and abrasion for a long period of time.

INSTRUCTIONS FOR USE

- Shake the aerosol well before using, approximately for one minute after hearing the sound of the mixer.
- Apply to clean, dry surfaces. On rusty metallic surfaces remove rust with a wire brush and prepare an anti-rust primer if considered necessary. Apply an anchor layer on plastics and polyesters.
- For best results apply in thin layers. Three thin layers are always better than one thick one, and may be repainted within fifteen minutes with the same paint.
- Turn the aerosol upside down to clean out the valve after use. If te nozzle becomes blocked replace it with a new one.
- Never apply to equipment that is plugged in and use in well ventilated areas.
- Request safety datasheets.

PHYSICAL PROPERTIES

High pressure:	Polyvalent female valve
Propellant:	Butane / Propane / Mix
Binding type:	Hydrocarbon
Color:	Silver
Dry to the touch (ASTM D-1640 ISO 1517):	10'
Completely dry (ASTM D-1640 ISO 1517):	2 h
Thickness of dry layer (ASTM D-823 ISO 2808):	15 micras/layer
Theoretical yield (continuous painting):	3,1 m ²
Thinner:	Aromatic mixture
Vida del producto:	(Well Stored) 5 years
Condition for application:	Minimum room temperature 8°C Surface temperature 5°C a 50°C Max humidity . 85% R.H.P
Heat resistance of paint:	150° C

CAUTION



APPEARANCE



LABEL



CAP SYSTEM



COLOR



Product information | TECHNICAL DATA SHEET

NITRO 2G - Black. Solid Color. Matt paint, low pressure y silver killer.
500 ml, 14 Oz, 390 g

GENERAL DESCRIPTION

Matt black, high coverage, solvent-based acrylic paint of exceptional quality, specially designed for use on silver (Silver Killer). Due to its characteristics it may also be used as a finishing coat.

FEATURES

- High pressure.
- Very fast drying.
- Easy to apply and repaint.
- Hardens after 2 hours
- Does not contain lead nor other heavy metals.
- Excellent covering capability.
- Silver Killer, covers metallic "leafing" paints.
- Silky matt black finish.

APPLICATIONS

Due to the characteristics of this product we recommend using it for final finishes. Since it is a high quality paint, it may also be used for an endless amount of jobs where its qualities are required.

- Graffiti
- Industry
- DIY
- Muralismo
- Crafts/hobby

INSTRUCTIONS FOR USE

- Shake the aerosol well before using, approximately for one minute after hearing the sound of the mixer.
- Apply to clean, dry surfaces. On rusty metallic surfaces remove rust with a wire brush and prepare an anti-rust primer if considered necessary. Apply an anchor layer on plastics and polyesters.
- For best results apply in thin layers. Three thin layers are always better than one thick one, and may be repainted within fifteen minutes with the same paint.
- Turn the aerosol upside down to clean out the valve after use.
If te nozzle becomes blocked replace it with a new one.
- Never apply to equipment that is plugged in and use in well ventilated areas.
- Request safety datasheets.

PHYSICAL PROPERTIES

High pressure:	Female valve
Propellant:	GLP C3-C4
Color:	Matt Black
Shine:	<10%
Dry to the touch (ASTM D-1640 ISO 1517):	10'
Completely dry (ASTM D-1640 ISO 1517):	20'
Thickness of dry layer (ASTM D-823 ISO 2808):	20 micras/layer
Adherence (ASTM D-3359 ISO 2409):	3B
Theoretical yield (continuous painting):	2,8 m ²
Thinner:	Ethyl acetate
Product life:	> 5 years
Condition for application:	Minimum room temperature 8°C
	Surface temperature 5°C a 50°C
	Max humidity . 85% R.H.P
Heat resistance of paint:	100°C
Repintado:	After 10'

* All of the adherence tests have been carried out on iron plates.

APPEARANCE



COLOR



LABEL



CAP SYSTEM



CAUTION

